


M230i Tamp

Versatile & reliable print & apply labelling

The M-Series Tamp **i-Tech** units provide a cost effective multi-purpose Print & Apply solution that suits many applications within product, carton & tray labelling meeting demands for both accuracy and speed. Providing you with a reliable, robust and easy to use design the **M230i** will give you continuously reliable labelling for many years to come - even in the most harsh industrial environments.

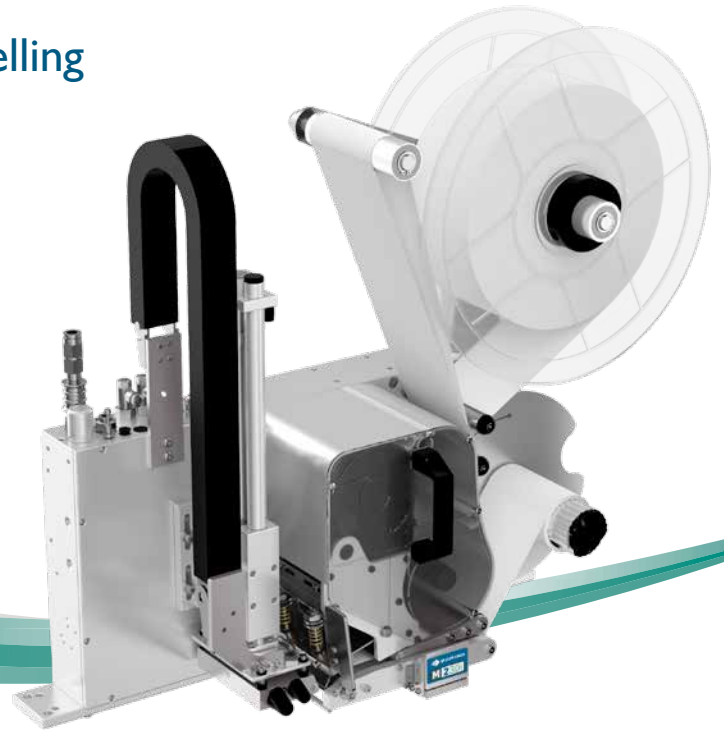

Easy to operate - simple operation and unrivalled capability

- ◆ Clear monitoring & control with optional **TouchPanel** colour user interface
- ◆ Easy navigation and operation with intuitive **QuickStep** software
- ◆ Minimum downtime with tool-free magnetic printhead mounting system & expanding ribbon mandrels

Lower Total Cost of Ownership – reduced cost and increased efficiency

- ◆ Increased printhead life
- ◆ Lower material wastage with full label coverage allowing optimum label size
- ◆ Increased uptime with fast consumable and print head changes

Improved performance - sets the standard for efficiency

- ◆ 600m ribbon & label roll capacity within a compact footprint
- ◆ Increased print speed for reduced cycle times
- ◆ Robust design supports all mounting orientations
- ◆ Supply chain compliance with full GSI coding capability at high resolution including bar codes, text and graphics



Benefits of Tamp Applicator


- ◆ Flexible multi-purpose Print & Apply solution
- ◆ Labelling of moving or stationary products
- ◆ Accurate & consistent label position
- ◆ Easy and fast consumable changes
- ◆ Side, top or bottom labelling
- ◆ Applies last label printed
- ◆ Industrial robust design
- ◆ Left and right hand versions as standard



Optional QuickStep User Interface

For effortless control and status reporting **QuickStep** is our unique, simplified operator interface that gets the printer into action quickly and simply. No complex menus or parameters, just enter the job and away you go.

- ◆ Quick access to favourite menus and settings via large user-friendly icons and customisable home screen.
- ◆ Easy, prompted input of data into label templates.
- ◆ Speed up changeovers and help eliminate coding selection errors with simplified Message Store and live WYSIWYG preview.

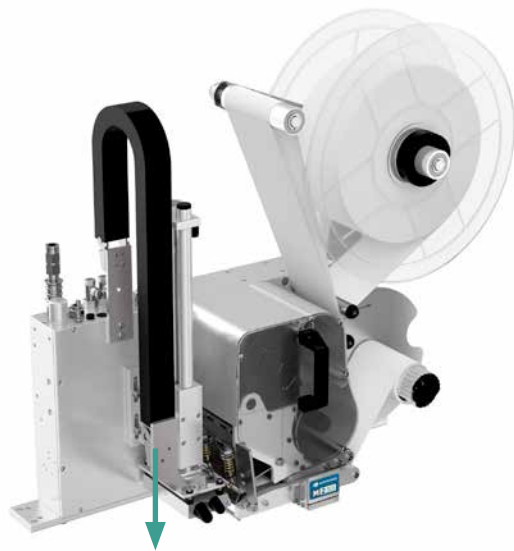

Technical Specification

Print technologies:	Thermal Transfer Optional: Direct Thermal or Label only
Print resolutions:	12 dots/mm (300dpi) Optional: 8 dots/mm (200dpi)
Typical speeds:	20-80 labels per min
Label sizes:	Up to 110 x 210mm
Label & ribbon lengths:	600m
Distance to product:	Up to 360mm
Pneumatics:	6 bar compressed air
Communication:	2 x RS232, 1 x USB 2.0, Ethernet
I/Os (configurable):	10 Inputs and 10 Outputs
User interface:	Graphical display with 25 languages
Overall Dimensions:	668 x 516 x 243mm (Printer & Applicator min) 668 x 858 x 314mm (Printer & Applicator max) 406 x 278 x 129mm (Controller - PCU)

Larger labels and longer stroke lengths are available - details on request

www.dominoprinting.co.id

M230i Tamp/1015 We reserve the right to change the design or specification of our products without notice. Some of the information contained in this brochure is general in nature and customers should check that it is applicable to their individual circumstances.

PT ZI-TECHASIA
Menara Jamsostek, Menara Utara lantai 22
Jl. Gatot Subroto No.Kav.38, Jakarta Selatan,
DKI Jakarta 12710

 : (021) 2526075
 : +62 812-8467-0108
 : ask@dominoprinting.co.id
 : www.dominoprinting.co.id