


M230i Corner Wrap

Reliable, secure labelling

The M-Series Corner Wrap **i-Tech** units are flexible and reliable automated Print & Apply tamp solutions. Incorporating the latest **i-Tech** features, the innovative corner wrap functionality and high labelling speed allow it to keep pace with most carton erector and filling lines.

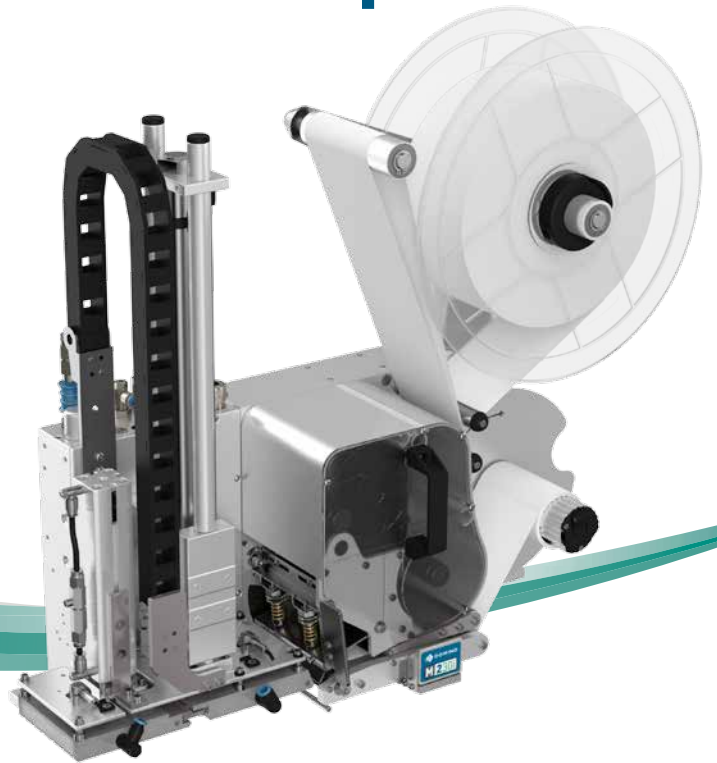

Easy to operate - simple operation and unrivalled capability

- ◆ Clear monitoring & control with optional **TouchPanel** colour user interface
- ◆ Easy navigation and operation with intuitive **QuickStep** software
- ◆ Minimum downtime with tool-free magnetic printhead mounting system & expanding ribbon mandrels

Lower Total Cost of Ownership – reduced cost and increased efficiency

- ◆ Increased printhead life
- ◆ Lower material wastage with full label coverage allowing optimum label size
- ◆ Increased uptime with fast consumable and print head changes

Improved performance - sets the standard for efficiency

- ◆ 600m ribbon & label roll capacity within a compact footprint
- ◆ Increased print speed for reduced cycle times
- ◆ Robust design supports all mounting orientations



Accurate label placement

The unique dual pad design ensures label placement accuracy to facilitate consistent downstream barcode reading, with the ability to handle variable label sizes.


As integration of software is an essential element in the design of the line, our cooperation with leading software companies makes integration simple and is the foundation for through-process serialisation.



Optional QuickStep User Interface

For effortless control and status reporting **QuickStep** is our unique, simplified operator interface that gets the printer into action quickly and simply. No complex menus or parameters, just enter the job and away you go.

- ◆ Quick access to favourite menus and settings via large user-friendly icons and customisable home screen.
- ◆ Easy, prompted input of data into label templates.
- ◆ Speed up changeovers and help eliminate coding selection errors with simplified Message Store and live WYSIWYG preview.

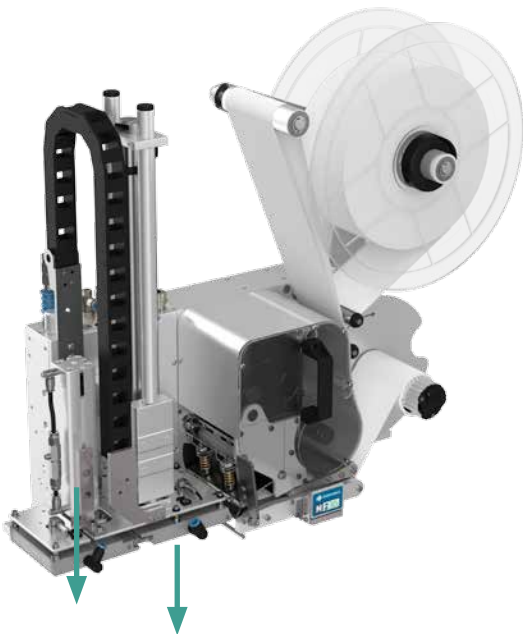

Technical Specification

Print technologies:	Thermal Transfer
Optional:	Direct Thermal or Label only
Print resolutions:	12 dots/mm (300dpi)
Typical speeds:	12-15 labels per min
Label sizes:	Up to 150 x 254mm
Label & ribbon lengths:	600m
Distance to product:	Up to 280mm
Pneumatics:	6 bar compressed air
Communication:	2 x RS232, 1 x USB 2.0, Ethernet
I/Os (configurable):	10 Inputs and 10 Outputs
User interface:	Graphical display with 25 languages
Overall Dimensions:	668 x 516 x 243mm (Printer & Applicator min) 668 x 858 x 314mm (Printer & Applicator max) 406 x 278 x 129mm (Controller - PCU)

OEM Print Engine version available. For further details, contact us.

PT ZI-TECHASIA

Menara Jamsostek, Menara Utara lantai 22
Jl. Gatot Subroto No.Kav.38, Jakarta Selatan,
DKI Jakarta 12710

www.dominoprinting.co.id

M230i Wrap/1015 We reserve the right to change the design or specification of our products without notice. Some of the information contained in this brochure is general in nature and customers should check that it is applicable to their individual circumstances.



: (021) 2526075



: +62 812-8467-0108



: ask@dominoprinting.co.id



: www.dominoprinting.co.id